


# ASSEMBLY INSTRUCTIONS

# EEI-5643

V1.07.05.21

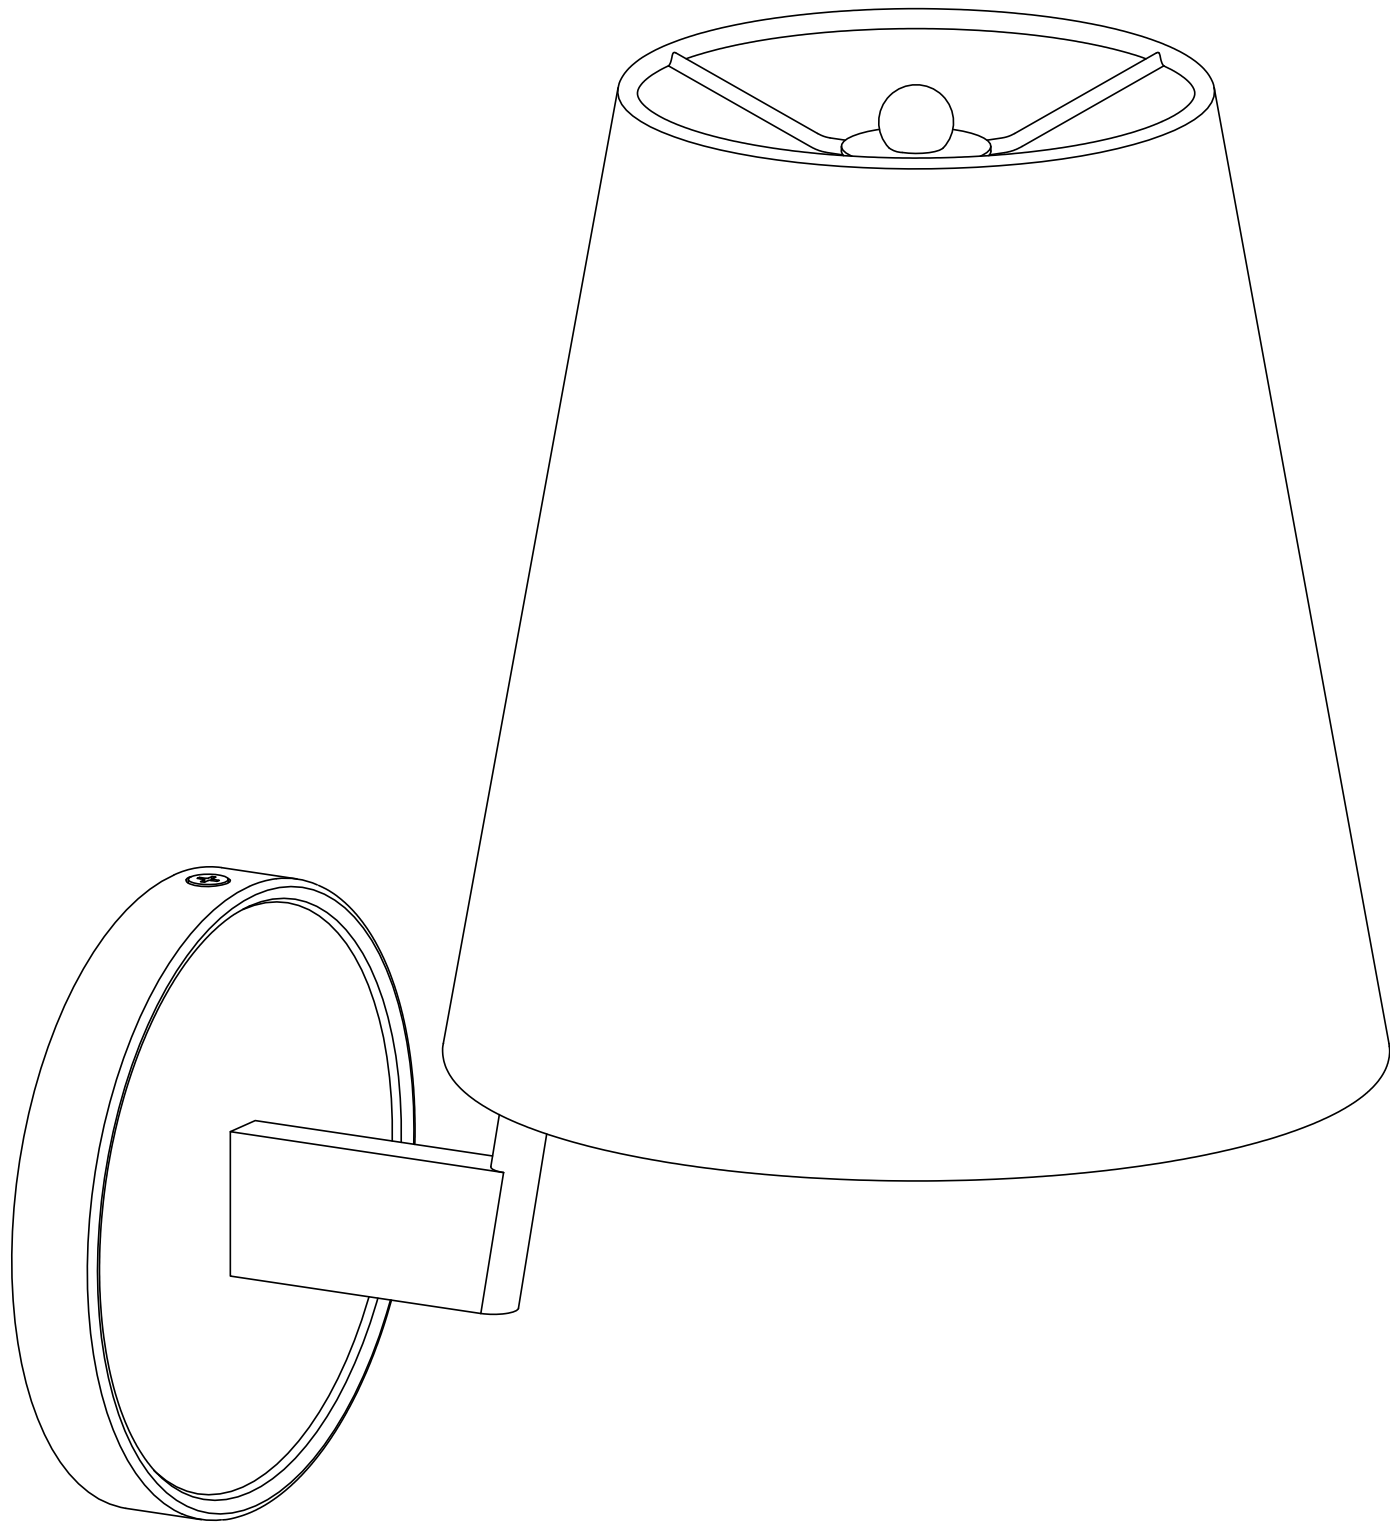

**Questions? Contact us!**

609.256.9000 • [cs@modway.com](mailto:cs@modway.com)  
[www.modway.com](http://www.modway.com)

**\*modway**

# Let's get started!



Read through all of the instructions before starting



Make sure you have all parts and components before discarding any packing materials



For hardwiring installation, we suggest hiring a professional electrician.

Do not over-tighten screws and bolts to avoid stripping the hardware or cracking the item.

Keep all components and packaging out of reach of children or animals to avoid risk of choking or suffocation.

Check all parts and hardware for damage. If the product is damaged, it should not be used.

We recommend LED bulbs. LEDs are better for energy consumption and can prolong the life of the fixture.

Installation and electrical connections must follow local and National Electric Code standards.

Ensure the main power supply is OFF before starting work to prevent electrical shock.

Allow the fixture to cool before changing the bulb. Fixture may get hot when in use.

## Provided hardware:

A		Mounting Plate (Preassembled)	x1
B		Long Screw	x2
C		Wire Connector	x3
D		Short Green Screw (Preassembled)	x1
E		Side Screw (Preassembled)	x2
F		Finnial Screw (Preassembled)	x1

## What you need:

- 1 Phillips Head Screwdriver
- 2 One (1) E26 (medium-base) Light Bulb (MAX. 60W)  
Bulb not included.

## You may also need:

- +Ladder
- +Electrical Tape
- +Wire Strippers or Cutters
- +Power Drill



### CARING FOR YOUR ITEM


Indoor use only.

Clean using a non-abrasive cloth and a mild cleaner.

Never use harsh chemicals, as they could damage the finish or integrity of the item.

Wait!


Missing parts or hardware? Need assistance?  
Contact us before returning your item. We're here to help!  
609.256.9000 • cs@modway.com

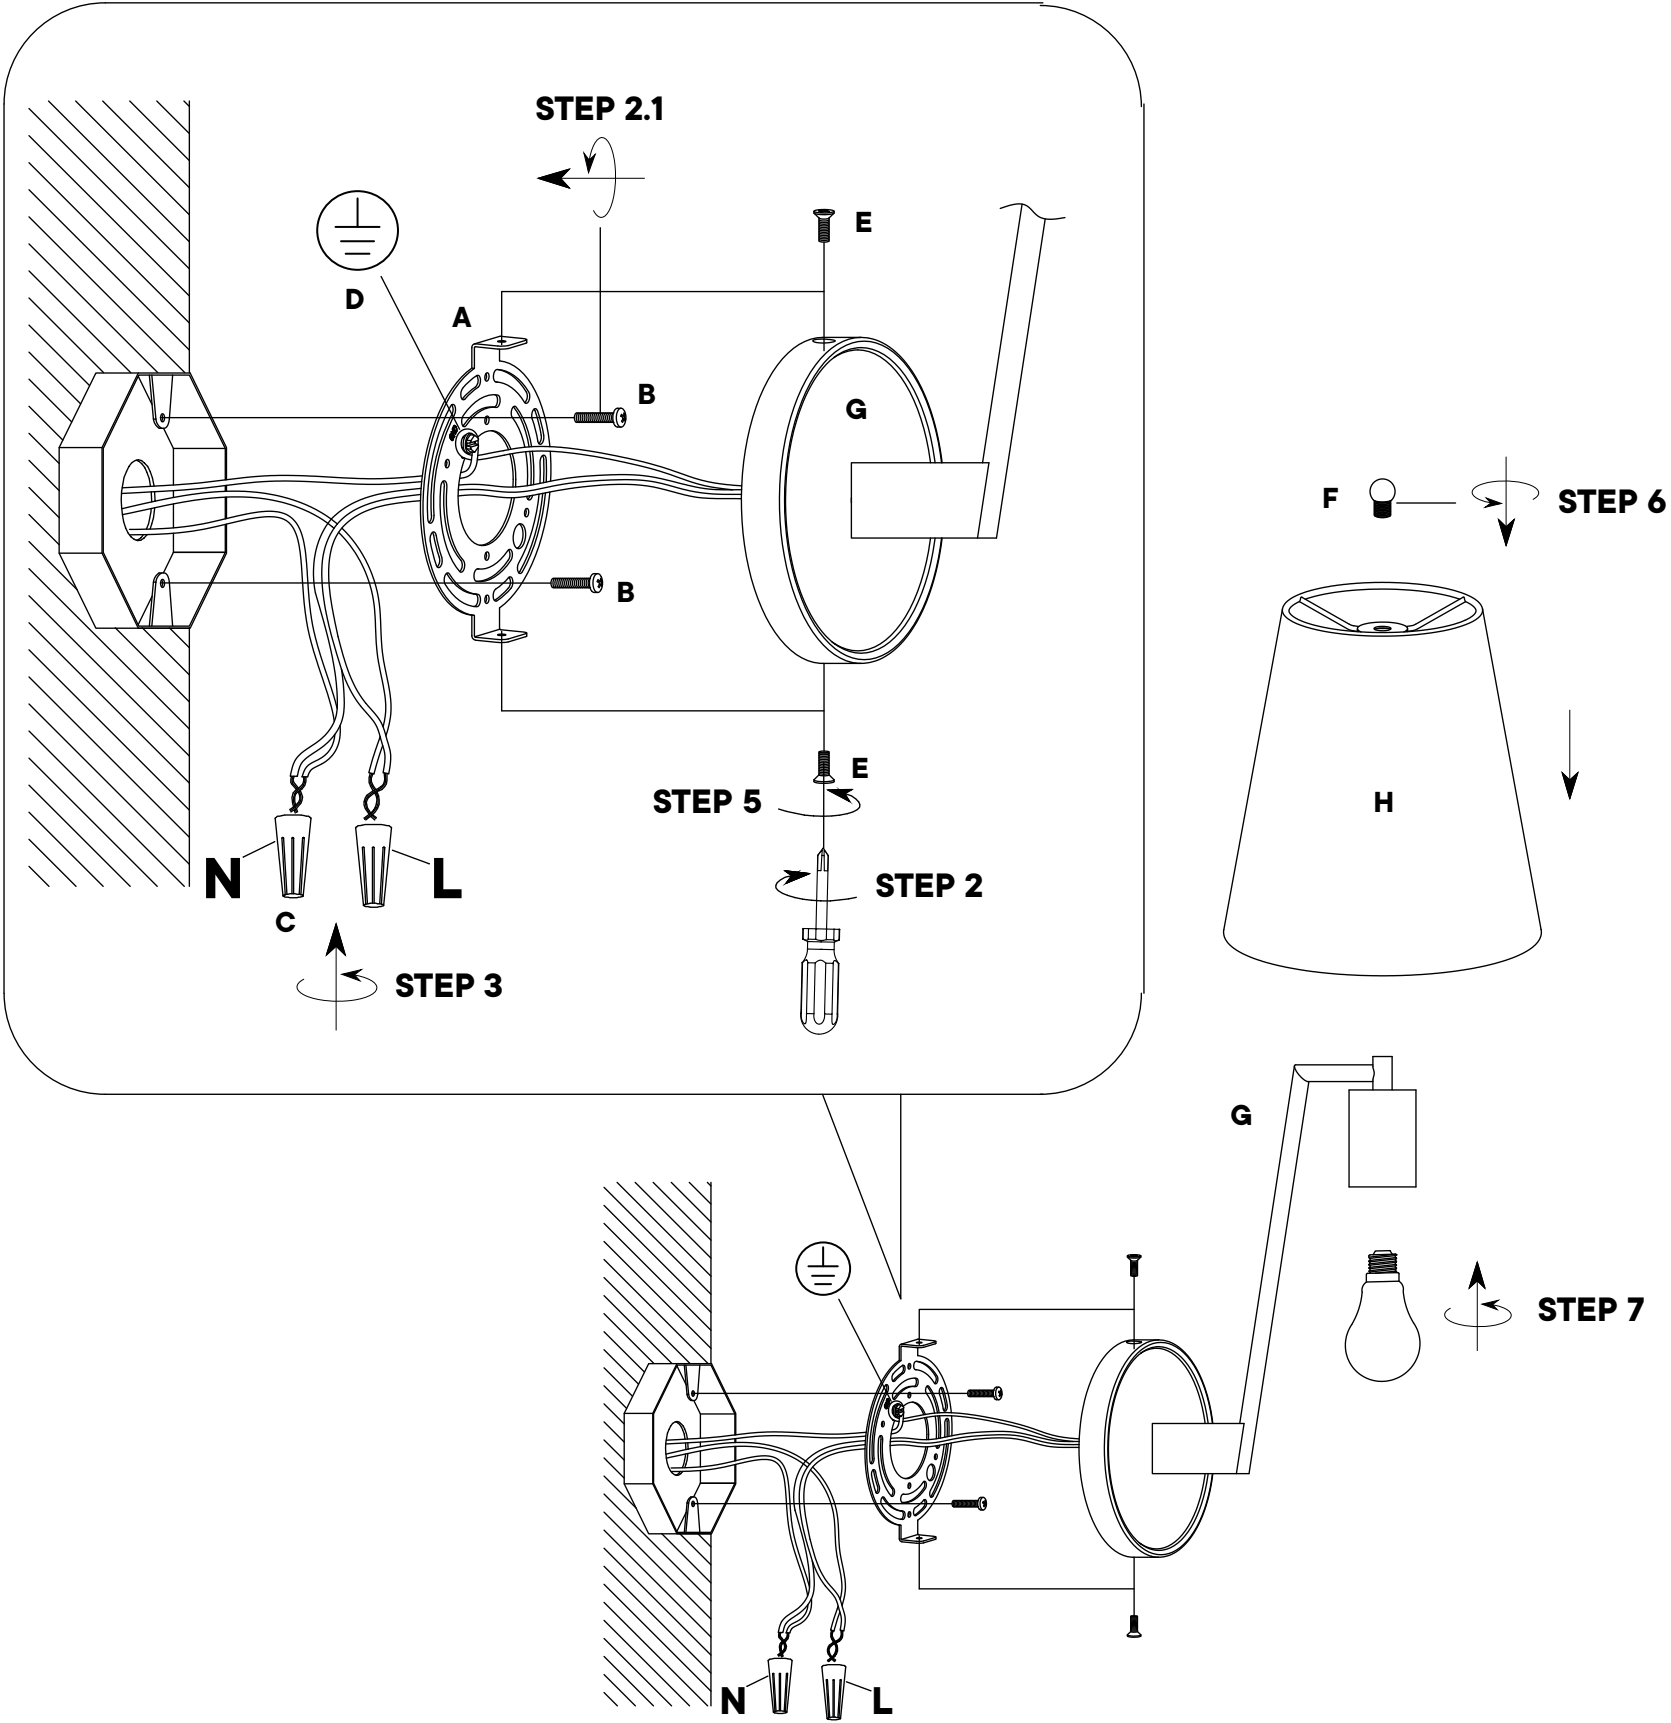

For safety, please consult a local electrician or code professional before installing your new fixture.

## Step 1

Before beginning TURN OFF POWER to the light from the fuse or circuit breaker.

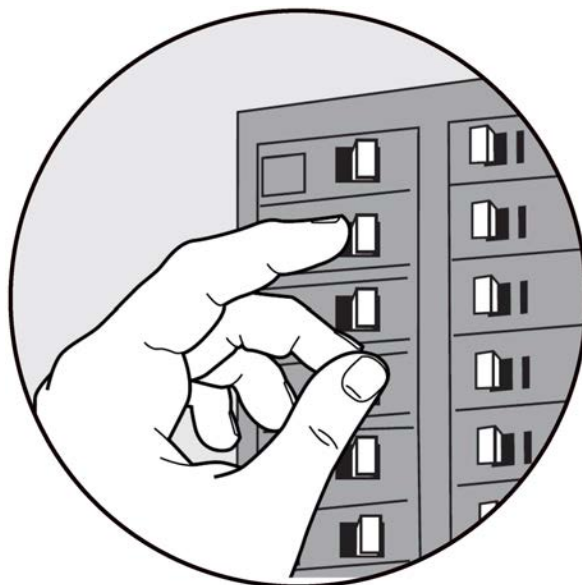

## Step 2


### HARDWARE

<b>A</b>	Mounting Plate	x1
<b>B</b>	Long Screws	x2


Remove Side Screw (E) to dismantle Mounting Plate (A) from the Wall Lamp Base (G). Keep the Side Screw (E) safe.

2.1 Attach the Mounting Plate (A) to the outlet box by using Long Screw (B).

2.2 Pull out all three wires from outlet box.

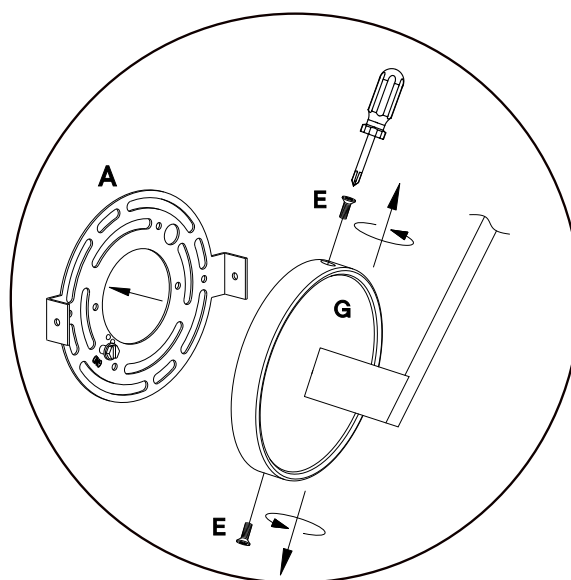

### STEP 2

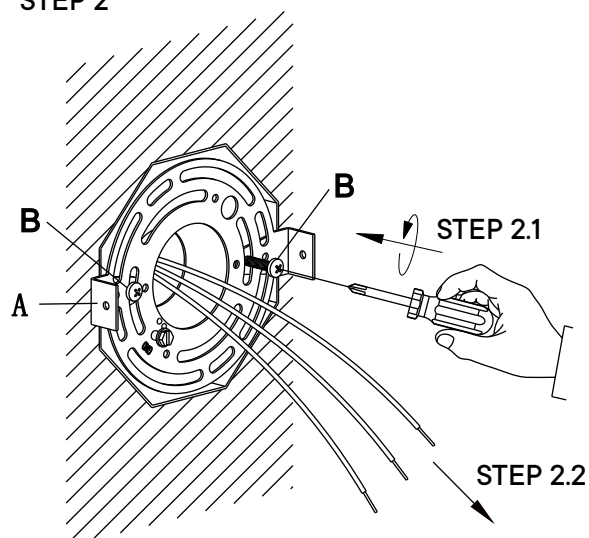

## Step 3

### HARDWARE



Wire Connector

x3

Connect wires with matching polarity.

Attach the wires from the outlet box to the wires from the light fixtures.



The black fixture wire connector to the black supply wire (**Live Wire**) (L) and the white fixtures wire to the white supply wire (**Neutral Wire**) (N).

Connect the copper ground wire to ground wire.

Secure each connection using a **Wire Connector** (C).


If there is no supply ground wire, attach the copper fixture wire to **Short Green Screw** (D) at the **Mounting Plate** (A) to ground.

Make the appropriate electrical connection according to your local state, and/or country code requirements.

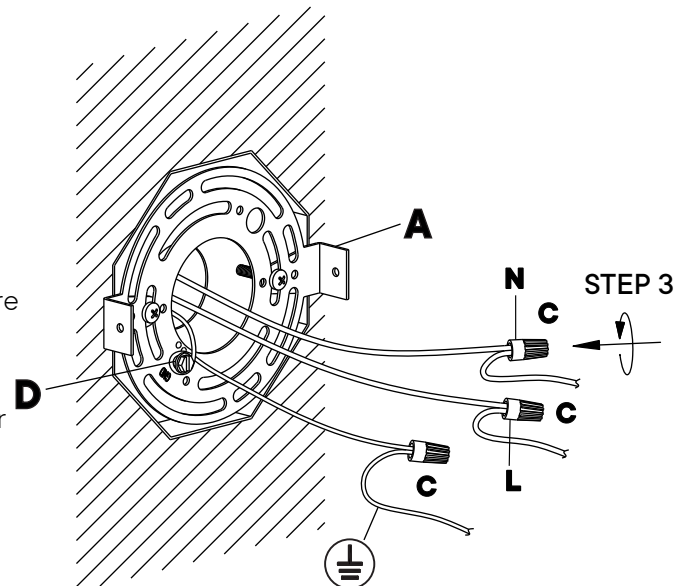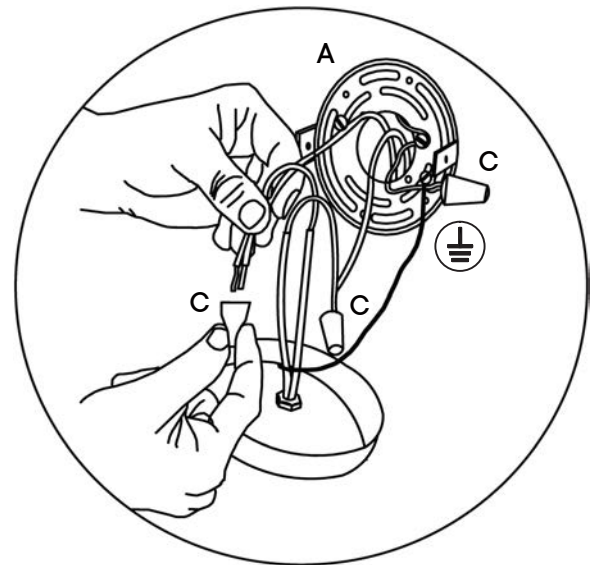

## Step 4

Push all wires into the outlet box.

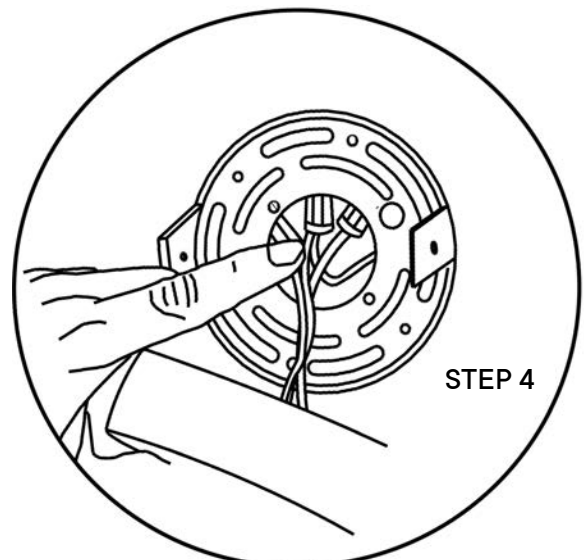


## Step 5

### HARDWARE

**E** Side Screws x2

Secure the **Wall Lamp Base (G)** to the **Mounting Plate (A)** by using **Side Screw (E)**.

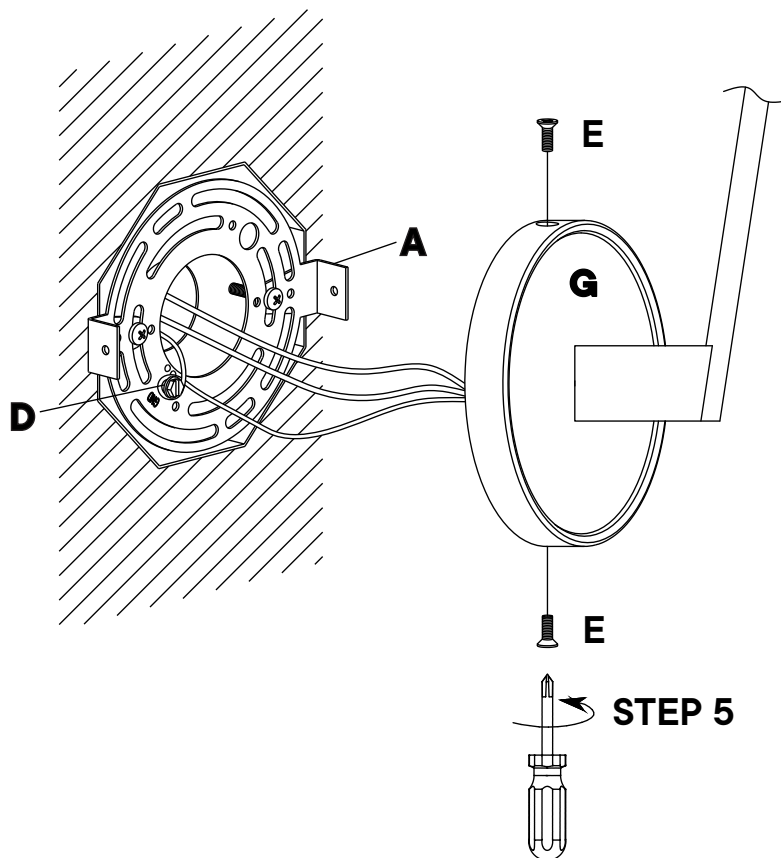


## Step 6

Using **Finial Screw (F)** to secure the **Lamp Shade (H)** to the **Arm (G)**.


### HARDWARE

**F** Finial Screw x1

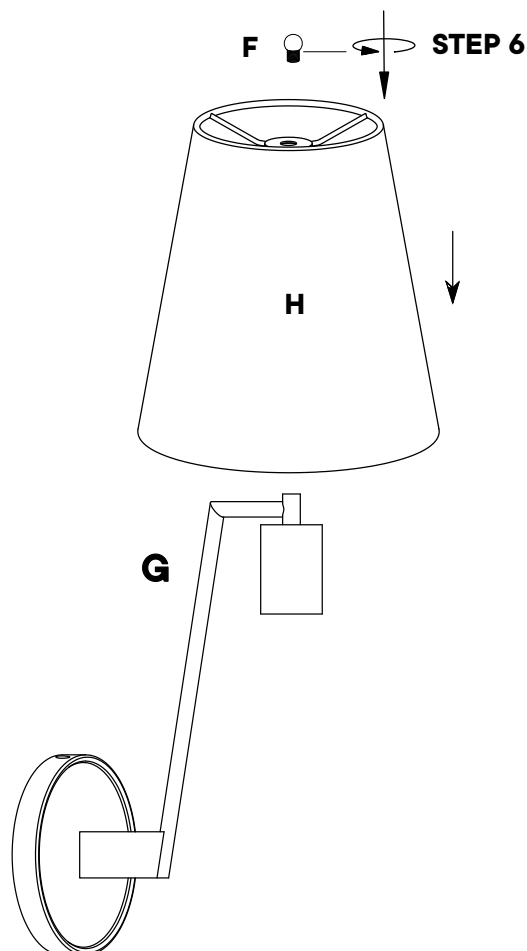

## Step 7

Install the light bulb according to the wattage label  
(E26, (Medium-base) Max. 60W).  
Bulb not included.

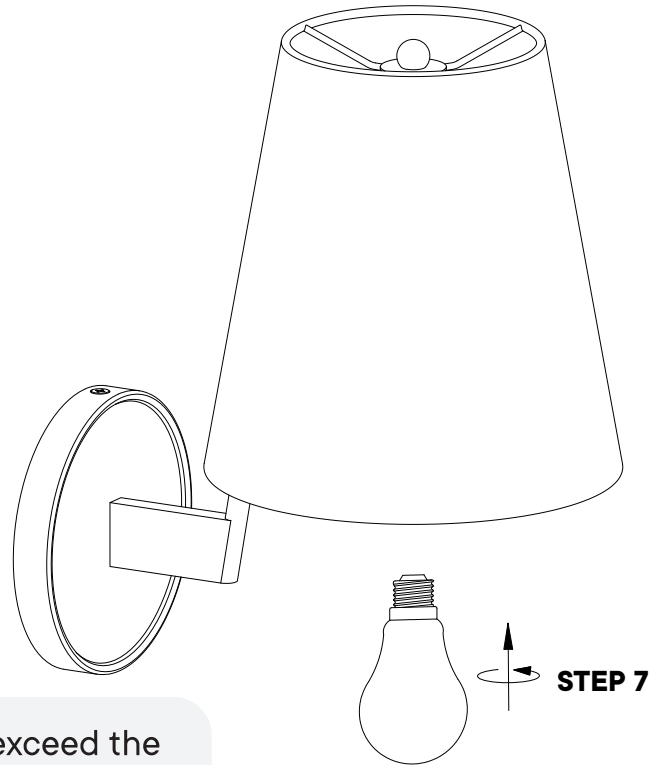

**ATTENTION:** To avoid the risk of fire, do not exceed the recommended wattage indicated on the wattage label.

## Great job!

Your new light fixture is ready for use.

### ♥ CARING FOR YOUR ITEM

Indoor use only.

Clean using a non-abrasive cloth and a mild cleaner.

Never use harsh chemicals, as they could damage the finish or integrity of the item.

CONNECT WITH US!   

Tag us @modway\_furniture and #modway  
for a chance to be featured.

