
EEI-3678/3679-NAT-TAU CHAIR

Thank you for purchasing the **MODWAY CHAIR!**


Before you start, here are some helpful advice:

- 1.We suggest you spend a short time reading through this leaflet and then follow the simple step by step instructions.
- 2.Owing to the size and weight of the chair, we recommend that it is assembled by two adults, on a carpeted or padded area, in the room that it is intended for. Approximate assembly time: 30 minutes.
- 3.Please do not use any tools other than those provided or recommended in these instructions.
- 4.Please do not throw away any of the packaging or instructions until you have checked all the components and hardware and the furniture is fully assembled.
- 5.Assemble all components loosely until advised to tighten. Depending on use, it may be necessary to tighten the components from time to time, so please save the tools that have been provided.
- 6.Please keep all pieces out of reach of children.

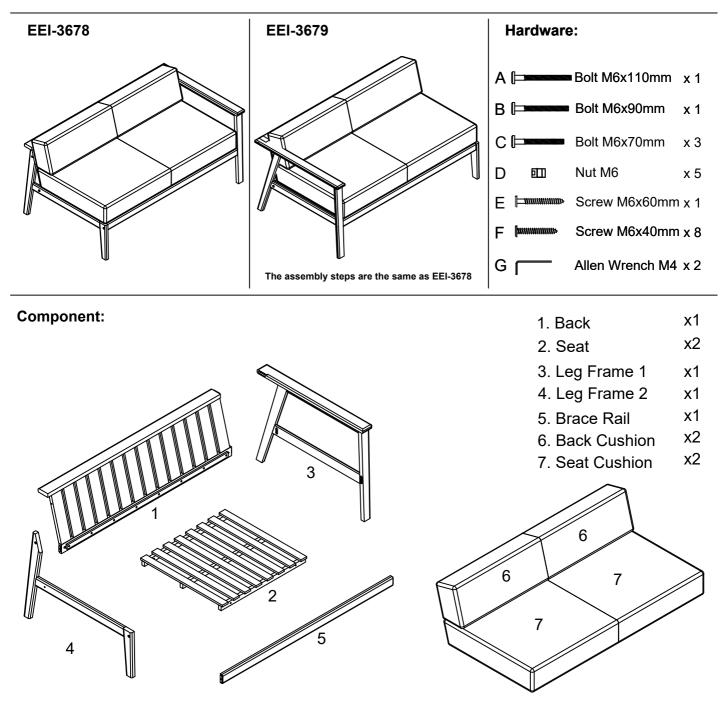

STEP 1:


Attach Leg Frame 1 (3) to Back (1) as shown. Insert 2 pieces of Nuts (D) into Back (1), then insert 1 piece of Bolt (A) and 1 piece of Bolt (C) through Leg Frame 1 (3) into Back (1). Tighten with 2 pieces of Allen Wrench (G).

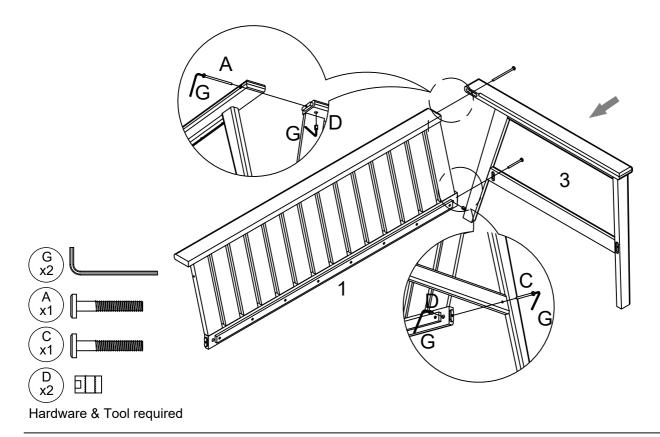

STEP 2:

Attach Brace Rail (5) to Leg Frame 1 (3) as shown. Insert 1 piece of Nut (D) into Brace Rail (5), then insert 1 piece of Bolt (B) through Leg Frame 1 (3) into Brace Rail (5).


Tighten with 2 pieces of Allen Wrench (G).

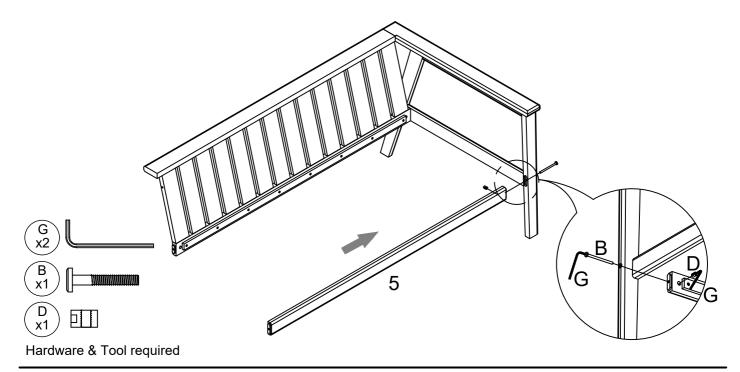

STEP 3:

Attach Leg Frame 2 (4) to Back (1), Brace Rail (5) and Leg Frame 1 (3) as shown. Insert 1 piece of Nut (D) into Back (1), then insert 1 piece of Bolt (C) and 1 piece of Screw (E) through Leg Frame 2 (4) into Back (1). Tighten with 0 pieces of Allen Wenneh (C)


Tighten with 2 pieces of Allen Wrench (G).

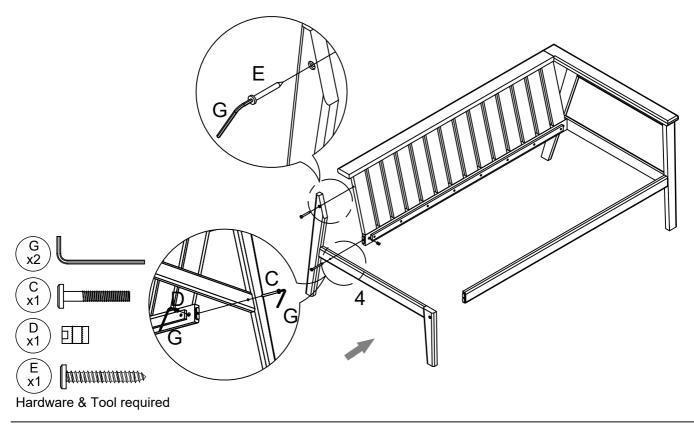

STEP 4:


Insert 1 piece of Nut (D) into Brace Rail (5), then insert 1 piece of Bolt (C) through Leg Frame 2 (4) into Brace Rail (5).

Tighten with 2 pieces of Allen Wrench (G).

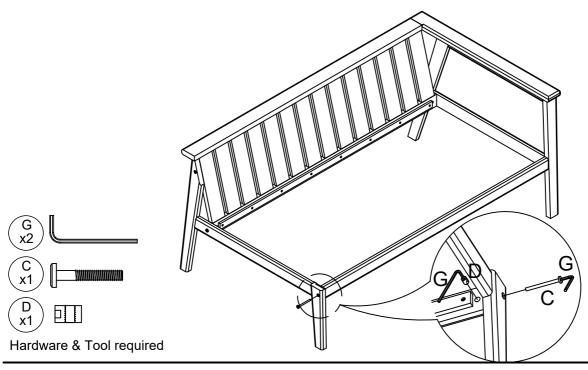

STEP 5:

Attach 2 pieces of Seat (2) to the assembled Back (1), Brace Rail (5) and Leg Frame (3&4) as shown. Then insert 8 pieces of Screws (F) through Seat (2) into Back (1), Brace Rail (5). Tighten with Allen Wrench (G).

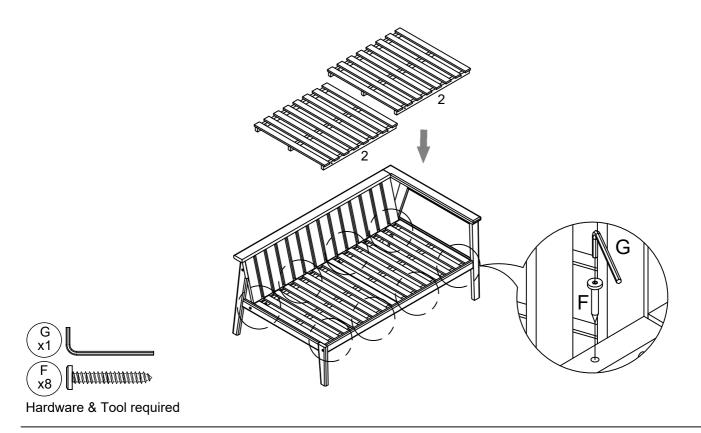

STEP 6:

Carefully position the assembled chair to the desired location.

Put 2 pieces of the Back Cushions (6) and 2 pieces of the Seat Cushions (7) into the assembled chair as shown.

