
ASSEMBLY INSTRUCTIONS

EEI-5652

V1.08.26.21



Let's get started!

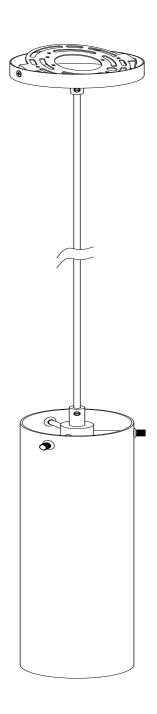



Read through all of the instructions before starting



Approx. 90 minutes assembly time



2 people recommended for assembly



Care instructions are listed in the last step of this manual



Make sure you have all parts and components before discarding any packing materials Do not over-tighten screws and bolts to avoid stripping the hardware or cracking the item.

Keep all components and packaging out of reach of children or animals to avoid risk of choking or suffocation.

Check all parts and hardware for damage. If the product is damaged, it should not be used.

We recommend LED bulbs. LEDs are better for energy consumption and can prolong the life of the fixture. Installation and electrical connections must follow local and National Electric Code standards.

Ensure the main power supply is OFF before starting work to prevent electrical shock.

Allow the fixture to cool before changing the bulb. Fixture may get hot when in use.

Provided hardware:

Α		Mounting Plate (Preassembled)	х1
В		Long Screw	x2
С		Wire Connector	хЗ
D		Short Green Screw (Preassembled)	x1
E		Side Screw (Preassembled)	x2
	_		

Finger Screw

(Preassembled)

хЗ

What you need:

Phillips



2 One (1) E26 (medium-base) Light Bulb (MAX. 60W) Bulb not included.

You may also need:

- + Ladder
- + Electrical Tape
- + Wire Strippers or Cutters
- + Power Drill




CARING FOR YOUR ITEM

Indoor use only.


Clean using a non-abrasive cloth and a mild cleaner.

Never use harsh chemicals, as they could damage the finish or integrity of the item.

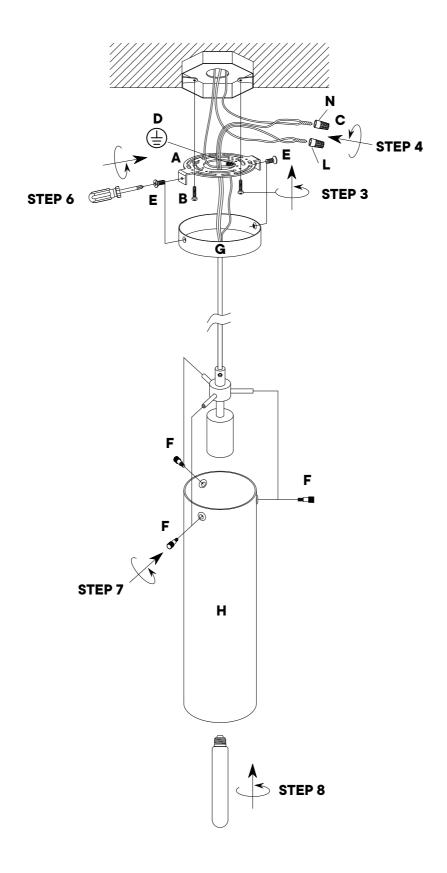


For safety, please consult a local electrician or code professional before installing your new fixture.

Before beginning **TURN OFF POWER** to the light from the fuse or circuit breaker.



Step 2

Dismantle the Mounting Plate (A) from the Ceiling Canopy (G) by removing the Side Screw (E). Keep the Side Screw (E) in a safe place.




Step 3

HARDWARE				
A	Mounting Plate	x1		
B	Long Screws	x2		

Attach the Mounting Plate (A) to the Electrical Box. Insert Long Screws (B) into each hole on mounting plate and align with holes in electrical box. Tighten all screws.

Pull out all three wires from the outlet box.



HARDWARE © Wire Connector x3

Connect wires with matching polarity.

Attach the wires from the outlet box to the wires from the light fixtures.


The black fixture wire connector to the black supply wire (Live Wire) (L) and the white fixtures wire to the white supply wire (Neutral Wire) (N).

Connect the copper ground wire to ground wire.

Secure each connection using a Wire Connector(C).

If there is no supply ground wire, attach the cooper fixture wire to Short Green Screw (D) at the Mounting Plate (A) to ground.

Make the appropriate electrical connection according to your local state, and/or country code requirements.




Step 5

Continue to support fixture. Make sure all connected wires are carefully placed inside of box and canopy.






Attach the Ceiling Canopy(G) to the Mounting Plate (A) by securing the Side Screw (E).

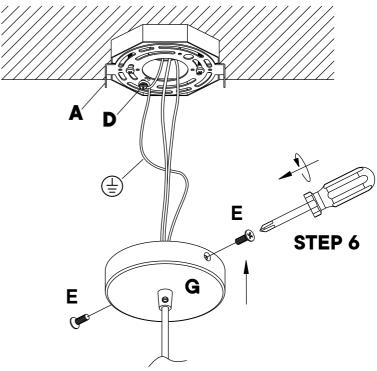


Step 7




Secure the Lamp Shade (H) with Finger Screw (F).

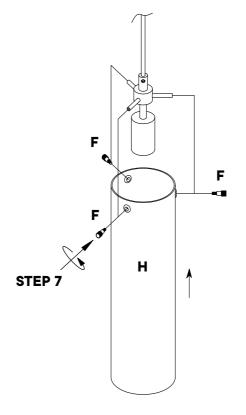

Install One (1) E26 (medium-base) Light Bulb (MAX. 60W), Bulb not included.



ATTENTION: To avoid the risk of fire, do not exceed the recommended wattage indicated on the wattage label.



Great job!

Your new pendant light fixture ready for use.



CARING FOR YOUR ITEM

Indoor use only.

Clean using a non-abrasive cloth and a mild cleaner.

Never use harsh chemicals, as they could damage the finish or integrity of the item.

CONNECT WITH US! (1) (1)





Tag us @modway_furniture and

#modway for a chance to be featured.

