

ASSEMBLY INSTRUCTIONS

EEI-5660

V1.06.22.21

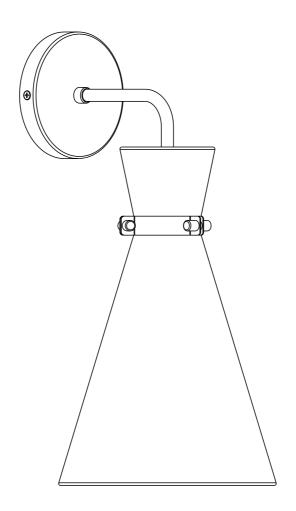

Let's get started!





Read through all of the instructions before starting

For hardwiring installation,

we suggest hiring a professional electrician.



Make sure you have all parts and components before discarding any packing materials

Do not over-tighten screws and bolts to avoid stripping the hardware or cracking the item.

Keep all components and packaging out of reach of children or animals to avoid risk of choking or suffocation.

Check all parts and hardware for damage. If the product is damaged, it should not be used.

We recommend LED bulbs. LEDs are better for energy consumption and can prolong the life of the fixture.

Installation and electrical connections must follow local and National Electric Code standards.

Ensure the main power supply is OFF before starting work to prevent electrical shock.

Allow the fixture to cool before changing the bulb. Fixture may get hot when in use.

Provided hardware:

Mounting Plate x1 (Preassembled) Long Screw х2 Wire Connector хЗ Short Green Screw x1 (Preassembled) Side Screw x2 (Preassembled)

What you need:



Phillips Head Screwdriver

2 One (1) E26 (medium-base) Light Bulb (MAX. 60W) Bulb not included.

You may also need:

- + Ladder
- + Electrical Tape
- + Wire Strippers or Cutters
- + Power Drill




CARING FOR YOUR ITEM

Indoor use only.

Clean using a non-abrasive cloth and a mild cleaner.


Never use harsh chemicals, as they could damage the finish or integrity of the item.

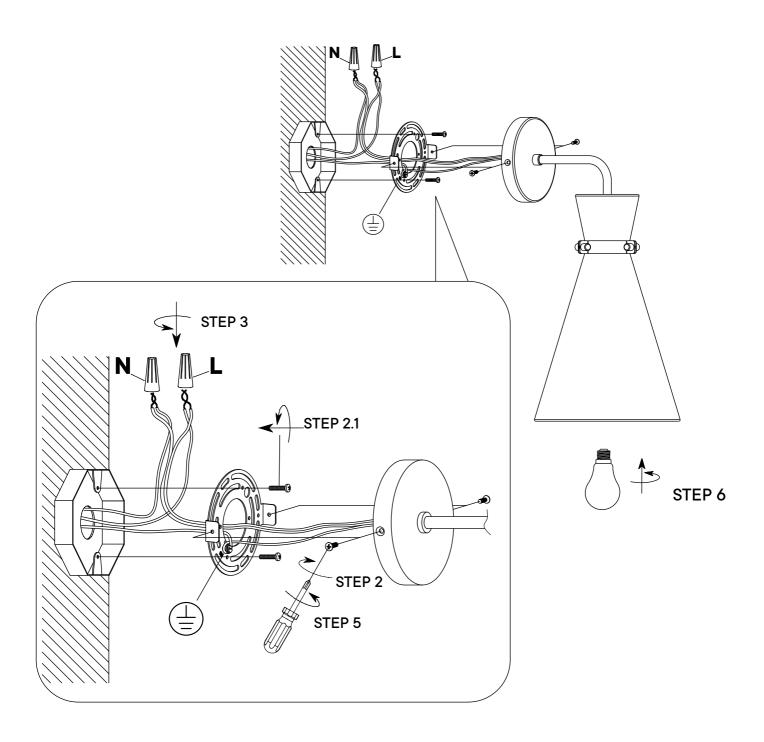

For safety, please consult a local electrician or code professional before installing your new fixture.

Step 1

Before beginning **TURN OFF POWER** to the light from the fuse or circuit breaker.




Step 2




Remove Side Screw (E) to dismantle Mounting Plate (A) from the Wall Lamp Base (F). Keep safe the Side Screw (E).

2.1 Attach the Mounting Plate (A) to the outlet box using Long Screw (B).

2.2 Pull out all three wires from the outlet box.





Step 3

HARDWARE Wire Connector x3

Connect wires with matching polarity.

Attach the wires from the outlet box to the wires from the light fixtures.


The black fixture wire connector to the black supply wire (Live Wire) (L) and the white fixtures wire to the white supply wire (Neutral Wire) (N).


Connect the copper ground wire to ground wire.

Secure each connection using a Wire Connector (C).

If there is no supply ground wire, attach the cooper fixture wire to the **Short Green Screw (D)** at the **Mounting Plate (A)** to ground.


Make the appropriate electrical connection according to your local state, and/or country code requirements.






Step 4


Push all wires into the outlet box.



Step 5




Secure the Wall Lamp Base (F) to the Mounting Plate (A) by using Side Screw (E).

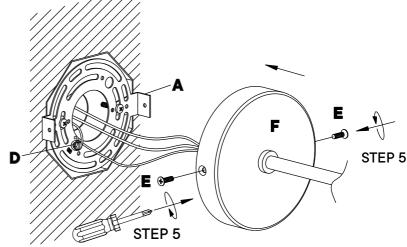

Step 6

Install the bulb according to wattage label (E26. MAX.60W) Bulb not included.

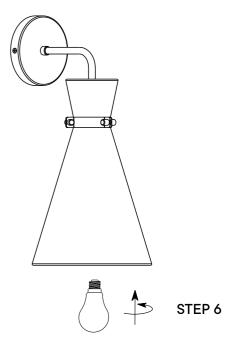

ATTENTION: To avoid the risk of fire, do not exceed the recommended wattage indicated on the wattage label.

Great job!

Your new light fixture is ready for use.



CARING FOR YOUR ITEM

Indoor use only.

Clean using a non-abrasive cloth and a mild cleaner.

Never use harsh chemicals, as they could damage the finish or integrity of the item.

CONNECT WITH US! (6) (7)







Tag us @modway_furniture and #modway for a chance to be featured.

