
ASSEMBLY INSTRUCTIONS

EEI-6209

V1.30.11.22



Questions? Contact us! 609.256.9000 • cs@modway.com www.modway.com

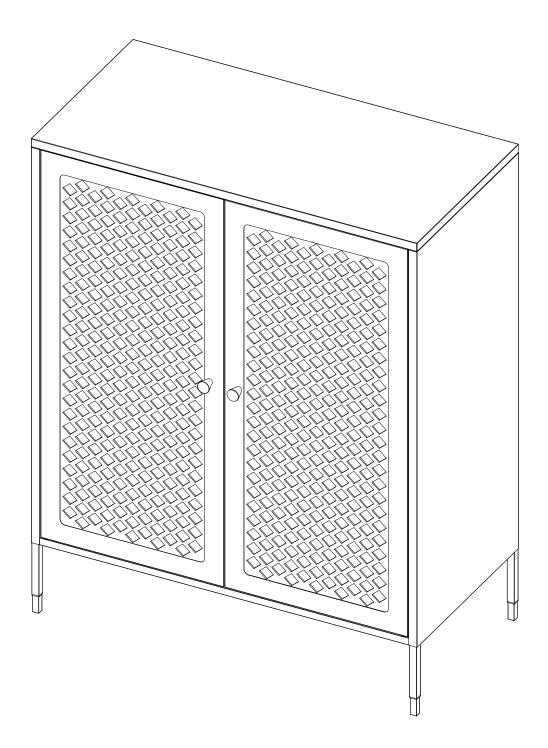

Let's get started!

*modway



Read through all of the instructions before starting



Approx. 30 minutes assembly time



2 people recommended for assembly

Furniture components:

Α Left Panel x1 Κ **Right Door Panel Right Panel** в x1 Back Left Panel С x1 D **Back Right Panel** x1 Е Top Panel x1 F **Bottom Panel** x1 G Shelf x2 н Front Leg x1 I. Back Leg x1 Left Door Panel J **x1**

Provided hardware:

0		Bottom Hinge	x2
Ρ		Plastic Cap	x15
Q		Pan Head Screw M4 x 25mm	x2
R	0	Ø10-Ø5.2	x2
s		Foot Protectors	x4
т	\bigcirc	Door Handle	x2
U		Shelf Holder	x8
v		Shelf Stopper	x8
w	٢	Adjustable Foot Pads	x4

Wait!

Care instructions are

listed in the last step of this manual



Make sure you have all parts and components before discarding any packing materials


x1

Only use hand tools to assemble this item. Do not use power tools. Do not tighten bolts or screws completely until all hardware is lined up and inserted into the holes.

Do not over-tighten screws and bolts to avoid stripping the hardware or cracking the item.

Assemble your item on a flat, carpeted area, with plenty of space to work. This will prevent damage and scratches to your floors or the item while you're assembling the product.

Keep all components and packaging out of reach of children or animals to avoid risk of choking or suffocation.

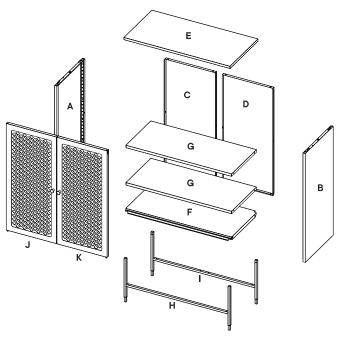

x			Magnet Bar Set	x4
Y	E CANA		Glove	x1
z		í	Anti Tipping Kits	x1

What you need:


Phillips	(=)	Phillips Head Screwdriver Not Included
⊖ Flat		Flat Head Screwdriver Not Included

Missing parts or hardware? Need assistance? Contact us before returning your item. We're here to help! 609.256.9000 · cs@modway.com


COMPONENTS

A	Left Panel	x1
B	Right Panel	x1
Ø	Top Panel	x1

Notes: Make sure the arrow direction for the Top Panel and Left/Right Panel is the same, then can fasten. If wrongly assembled, it won't be easy to disassembly.

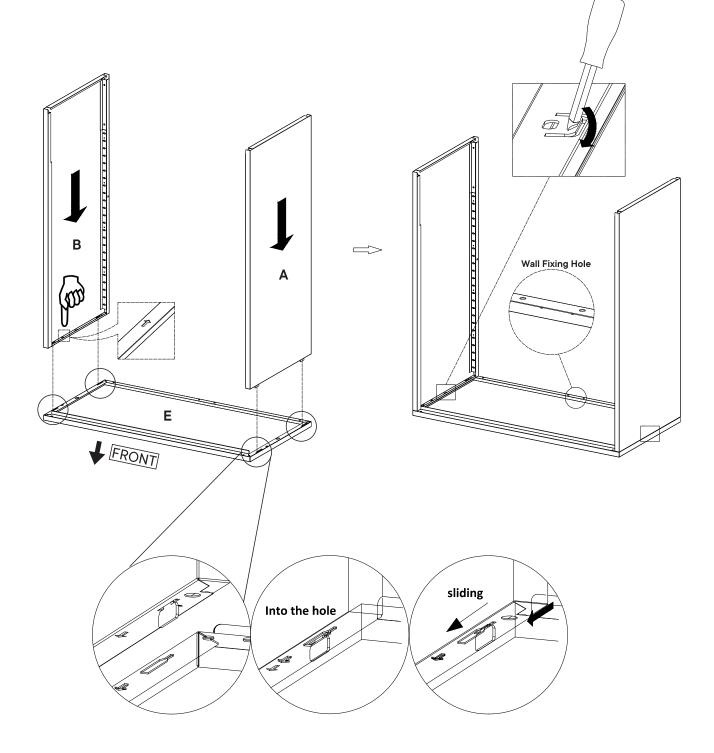


*modway

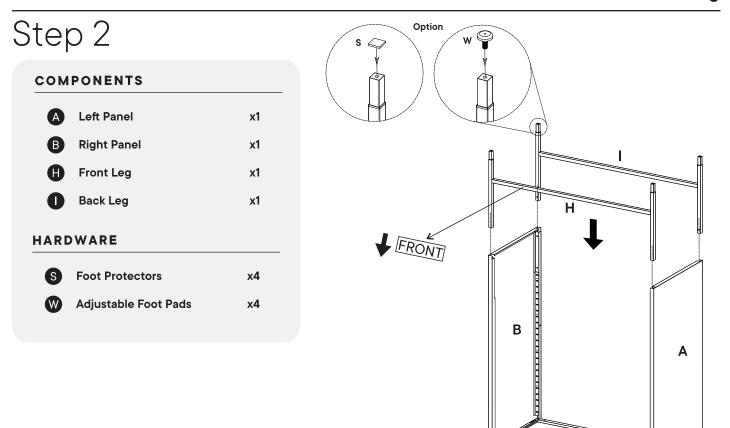


Step 3

сом	PONENTS	
A	Left Panel	x1
B	Right Panel	x1
HARD	WARE	
P	Plastic Cap	x4

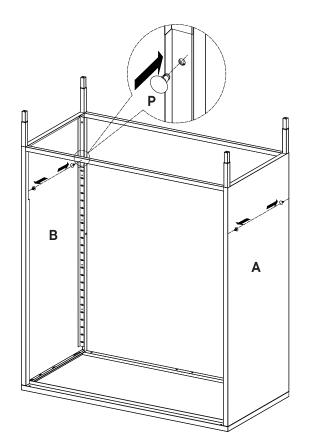


COMPONENTS				
A	Left Panel	x1		
B	Right Panel	x1		
C	Back Left Panel	x1		
D	Back Right Panel	x1		
HARD	WARE			
P	Plastic Cap	x11		

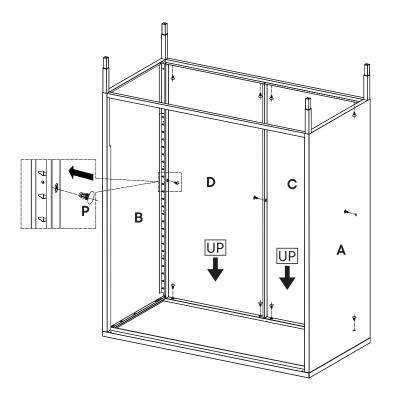


Step 5

COMPONENTS

Left Panel	x1
Right Panel	x1
Back Left Panel	x1
Back Right Panel	x1
Bottom Panel	x1
	Right Panel Back Left Panel Back Right Panel

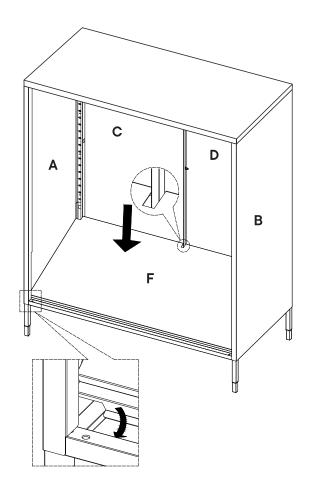


сом	COMPONENTS			
A	Left Panel	x1		
B	Right Panel	x1		
C	Back Left Panel	x1		
D	Back Right Panel	x1		
HARDWARE				
0	Shelf Holder	x8		

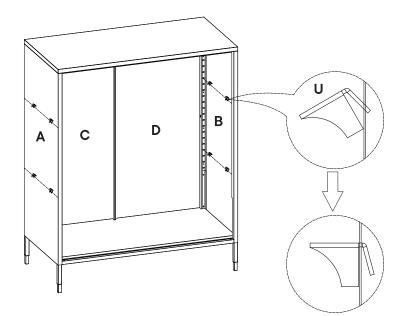

Step 7




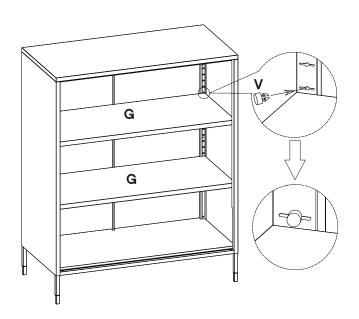


COMPONENTS		
J	Left Door Panel	x1
K	Right Door Panel	x1
HARDWARE		
0	Bottom Hinge	x2
R	Ø10-Ø5.2	x2

Press the door post into the door, align it with the hole on the top and release it to lock into the hole.

Repeat this step to component (K), Right Door Panel.

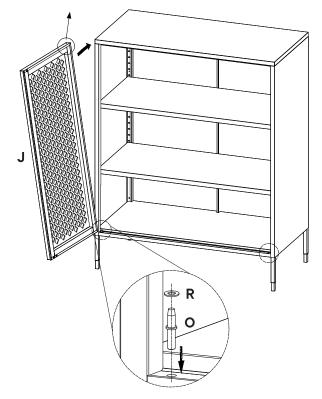

Step 9

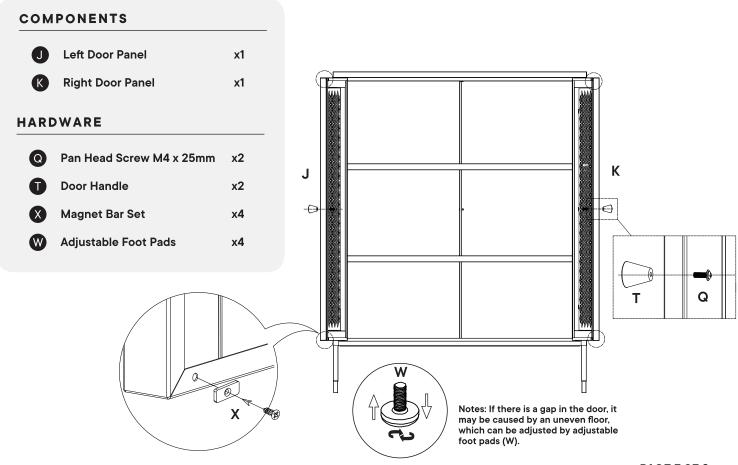

Great job!

Your cabinet is complete.

\bigcirc caring for your item

Indoor use only.


Not contract grade.

Clean using a non-abrasive cloth and a mild cleaner.

Never use harsh chemicals, as they could damage the finish or integrity of the item.



Tag us **@modway_furniture** and **#modway** for a chance to be featured.

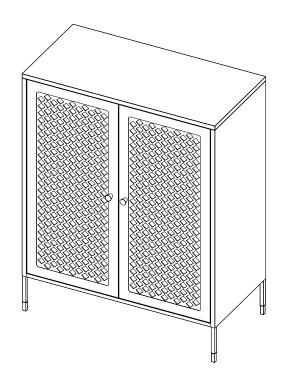


TIPPING RESTRAINTS KIT (Z) INSTALLATION GUIDANCE

Different wall materials require unique wall fasteners.

The wall plugs (AA2) and screws (AA3) are designed for fixing to concrete walls only.

Please consult your local hardware store to ensure you are using the correct hardware for you wall type.

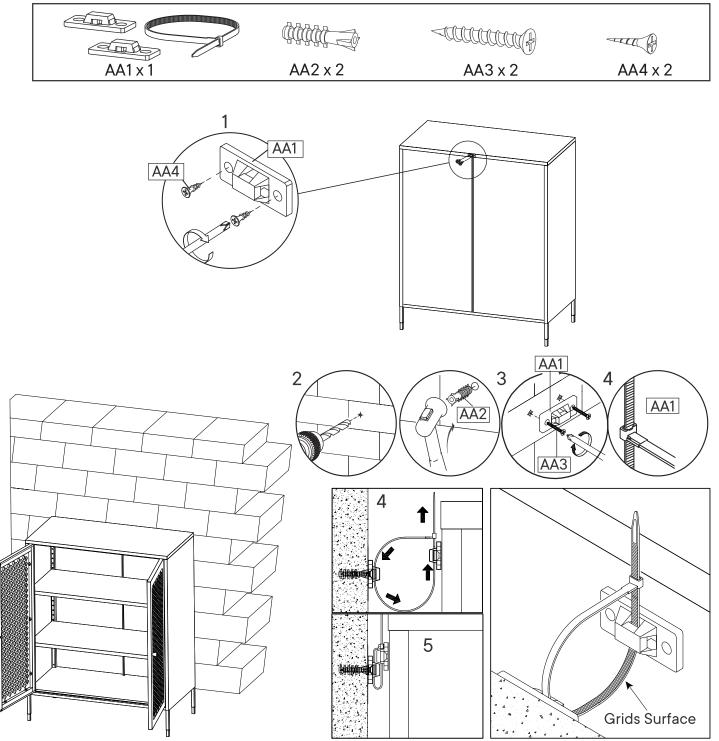

Installation Instructions :

- 1. Attach bracket (AA1) securely to the back top of the furniture using screw (AA4) provided.
- 2. Please make a hole for wall plugs position on the wall and minimum 15 mm below bracket secured to the back of unit attach the wall plugs (AA2).
- 3. Lace the end of the restrains strap through the larger hole in each bracket. Ensure the restrains strap with grids surface facing the inner loops. Bring both ends together and slide the at end through the locking end and draw it through until all slack is removed.
- 4. Make sure that the strap is securely laced & locked.