# \*modway MOD - 6122

### **ASSEMBLY INSTRUCTIONS**

Read instructions carefully. See furniture and hardware part list on the right for guidance.

Have all parts ready before assembly. Place all wooden furniture parts on a clean and flat soft surface to prevent scratching. Before you start, here are some words of caution:

ITEM	DESCRIPTION	QTY
A	HEADBOARD	1 PC
В	SUPPORT BOARD	2 PCS


PART LIST

	PART LIST				
l	ITEM	DESCRIPTION	QTY		
	1	JCBB BOLT M8 x 50mm	4 PCS		
l	2	M8 FLAT WASHER	4 PCS		
ı	3	M5 ALLEN KEY	1 PC		

- 1. Do not FULLY TIGHTEN nuts and bolts until all nuts and bolts are partially tightened.
- 2. Do not FULLY TIGHTEN nuts and bolts to avoid causing damage to the threading.
- 3. Keep all hardware parts out of reach of children.


NOTE: THE LIST AND QUANTITY SHOWN ARE FOR 1 UNIT ASSEMBLY.

#### STEP 1

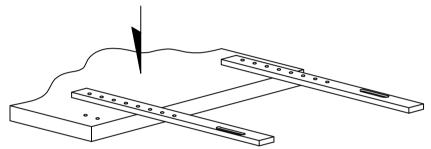


Align pre-drilled support stand holes over the pre-drilled headboard holes according to your desired headboard height

#### STEP 2

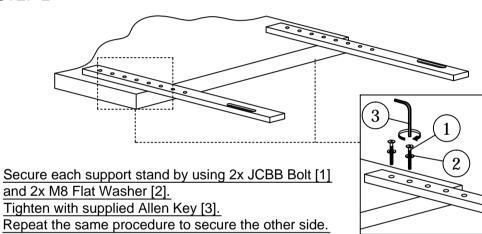

#### STEP 3

Your headboard assembly is complete.
Note: Hardware may loosen over time. Periodically check that all connections are tight.



## \*modway MOD - 6122

### ASSEMBLY INSTRUCTIONS (BED FRAME)


Read instructions carefully. See furniture and hardware part list on the right for guidance.

Have all parts ready before assembly. Place all wooden furniture parts on a clean and flat soft surface to prevent scratching. Before you start, here are some words of caution:

FURNITURE PART LIST		
ITEM	DESCRIPTION	QTY
A	HEADBOARD	1 PC
В	BED FRAME	1 PC

HARDWARE PART LIST					
ITEM	DESCRIPTION	QTY			
1	JCBB BOLT M6 x 60mm	4 PCS			
2	JCBB BOLT M6 x 35mm	4 PCS			
3	M6 FLAT WASHER	8 PCS			
4	M6 SPRING WASHER	4 PCS			
5	M6 HEX NUT	4 PCS			
6	M4 ALLEN KEY	1 PC			

- 1. Do not FULLY TIGHTEN nuts and bolts until all nuts and bolts are partially tightened.
- 2. Do not FULLY TIGHTEN nuts and bolts to avoid causing damage to the threading.
- 3. Keep all hardware parts out of reach of children.

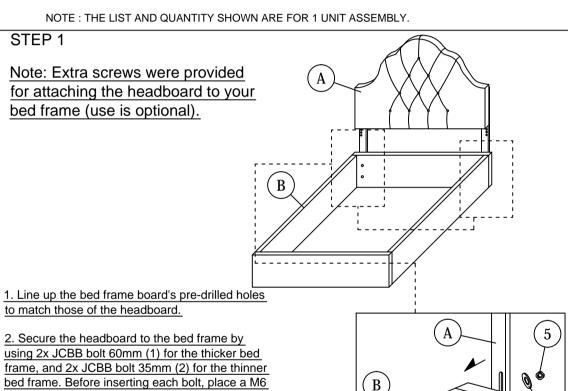

- 2. Secure the headboard to the bed frame by using 2x JCBB bolt 60mm (1) for the thicker bed frame, and 2x JCBB bolt 35mm (2) for the thinner bed frame. Before inserting each bolt, place a M6 spring washer (4) and M6 flat washer (3) on each bolt. Then fit a M6 flat washer (3) on the screw as it protrudes through the other side of the bed frame.
- 3. Place a M6 Hex Nut (5) after the M6 flat washer (3) at the end of each screw. Then tighten by using the M4 Allen key (6).
- 4) Repeat the same procedure for each screw and each side of the bed frame.

