


Thank you for purchasing the MODWAY FULL/QUEEN BED!

Before you start, here are some helpful advice:

- 1. We suggest you spend a short time reading through this leaflet and then follow the simple step by step instructions.
- 2. Owing to the size and weight of the bed, we recommend that it is assembled by two adults, on a carpeted or padded area, in the room that it is intended for. Approximately as sembly time: 45 minutes.
- 3. Please do not use any tools other than those provided or recommended in these instructions.
- 4. Please do not throw away any of the packaging or the instruction until you have checked all the components and hardware and the furniture is fully assembled. Please ensure that the packaging is disposed of in a safe environmentally friendly way.
- 5. Assemble all components loosely until advised to tighten. Depending on use, it may be necessary to tighten the components from time to time, so please save the tools that has been provided.
- 6. Please keep all fitting out of reach of children.



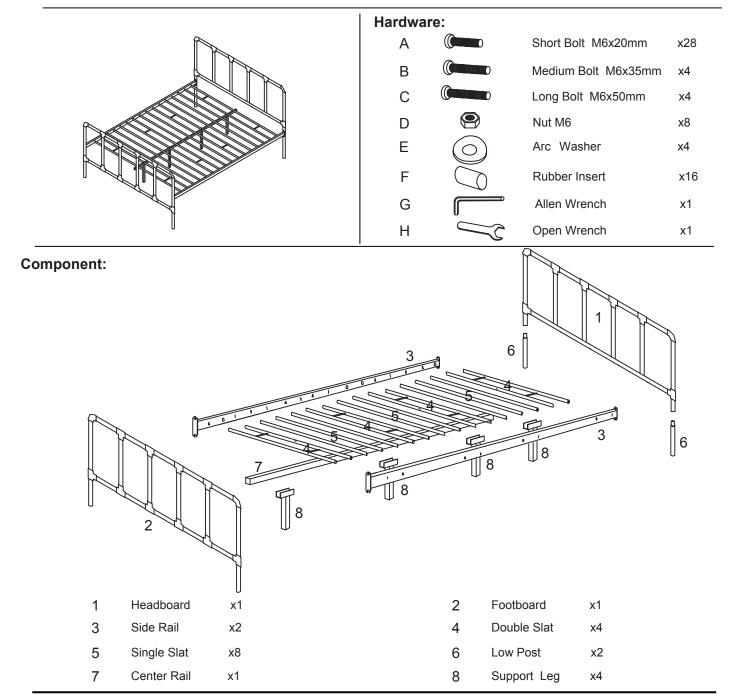


STEP 1:

Take off the protective plastic caps from the bottom of Headboard (1) Insert Low Post (6) into Headboard (1) as shown.

Attach by using Arc Washer (E) and Short Bolt (A) from the holes on the back of Low Post (6) and Headboard (1).

Use Allen Wrench (G) to tighten Short Bolts (A) clockwise until secure.

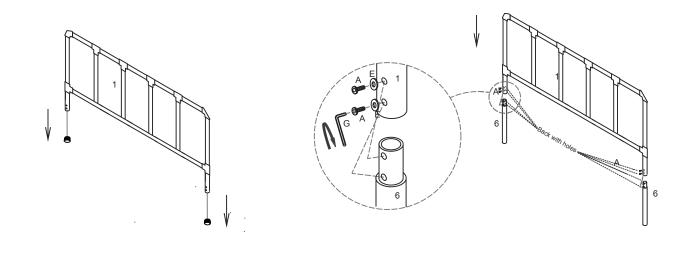


Ax4	Ex4	Gx1

Hardware & Tool required

STEP 2:

Insert 4 pieces of **Medium Bolt (B)** into the 4 holes on **Center Rail (7)** to connect it with **Support Legs (8)** as shown. Please pay attention to the holes 'direction.

Tighten Medium Bolt (B) with Nut (D) by using Allen Wrench (G) and Open Wrench (H) until secure.

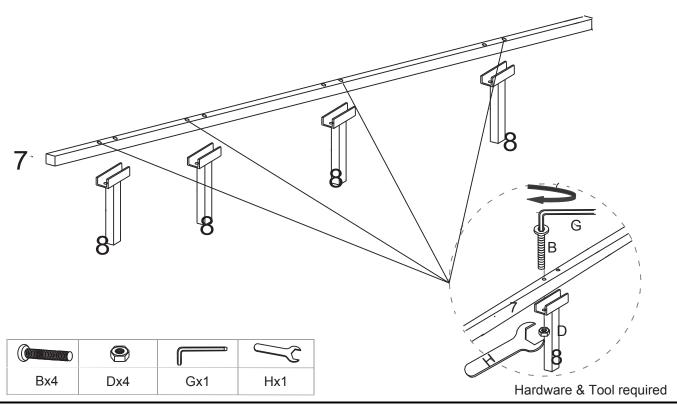



STEP 3:


Take out all **Double Slats (4)** and place them as shown.

Attach Double Slats (4) to the Center Rail (7) by using Bolts (C) and Nuts (D).

Please pay attention to the holes' direction on the **Double Sitas (4).**

Tighten Long Bolts (C) and Nuts (D) with Allen Wrench (G) and Open Wrench (H).

Do not fully tighten **Long Bolts (C)** at this step.

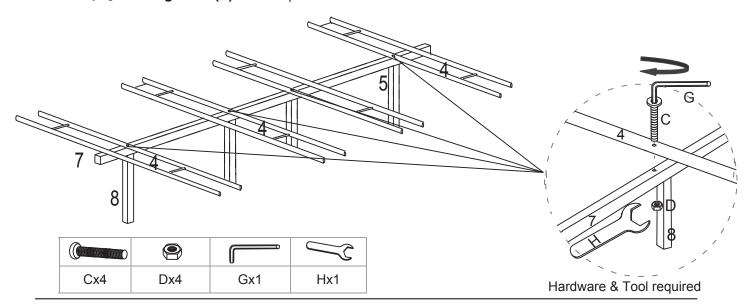

STEP 4:


Take out **Single Slats (5)** and place them as shown.

Insert one end of **Single Slats (5)** into **Rubber Insert (F)** then insert them into the crossponding holes on 1 piece of **Side Rail (3)** as shown.

Attach assembled **Double Slats (4)** to the **Side Rail (3)** by using **Short Bolts (A)**.

Tighten Short Bolts (A) with Allen Wrench (G). Do not fully tighten Short Bolts (A) at this step.

Repeat above for the other Side Rail (3).

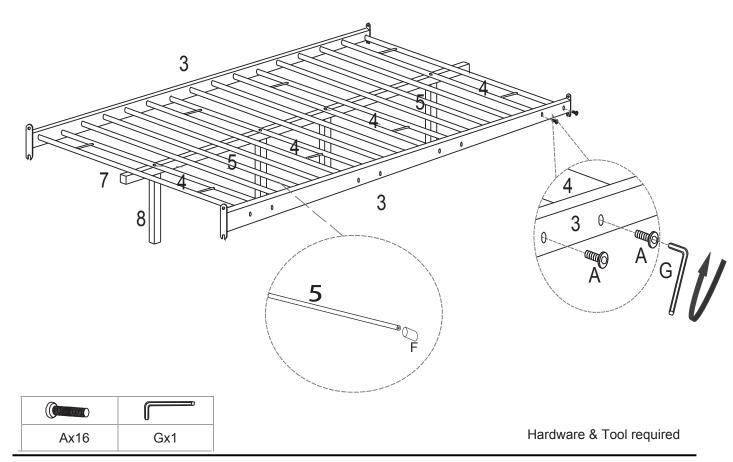



STEP 5:

Insert Bolts (A) into the bottom holes on the assembled Headboard (1&6) & Footboard (2) by hand.


Leaving 0.3~0.4inch space of the thread of **Bolts (A)** as shown.

Insert the notch of assembled Side Rails(3&4&5) into the space left on the Bolts (A).

Screw Bolts (A) into the top holes on the assembled Headboard (1&6) & Footboard (2) as shown.

Fix Bolts (A) with Allen Wrench (D) after all assembled.


Please fully tighten all Bolts (A&C) at this step.

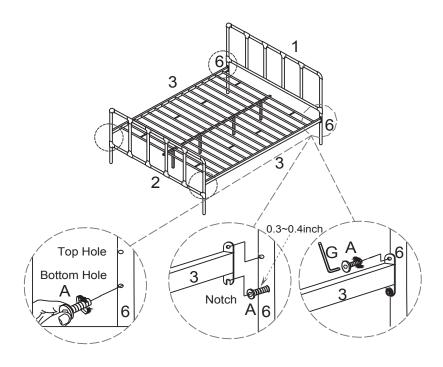

AX8	Gx1

Hardware & Tool required

STEP 6:



Assembly is complete. Your bed is ready to be enjoyed now!